


# Ösenlasthaken mit Sicherung

nach EN 1677-2


Typ	Traglast kg	Abmessungen								Gewicht kg	Preis pro Stück Euro
		a	b	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	h	m	t		
6-8	1.120	32	16	12	27	34	21	22	91	0,37	22,10
8-8	2.000	44	20	13	29	47	27	30	112	0,67	28,10
10-8	3.150	53	26	17	34	54	36	36	138	1,36	36,50
13-8	5.300	66	32	20	40	70	47	47	170	2,81	59,30
16-8	8.000	61	37	26	54	70	49	50	192	3,95	87,00



# Gießereihaken

nach EN 1677-2

Typ	Traglast kg	Abmessungen								Gewicht kg	Preis pro Stück Euro
		a	b	d <sub>1</sub>	d <sub>2</sub>	h	m	s	t		
6-8	1.120	30	20	10	13	26	50	97	95	0,54	16,80
8-8	2.000	40	25	12	18	32	63	120	121	1,00	23,30
10-8	3.150	49	32	16	20	38	75	147	145	1,86	36,10
13-8	5.300	58	39	20	25	43	87	170	175	3,13	49,80
16/18-8	10.000	68	45	24	34	54	98	200	204	5,18	80,20
20/22-8	15.000	83	56	32	46	65	118	254	250	10,60	198,60
26-8	21.200	96	72	34	52	80	136	280	305	13,00	969,30
32-8	31.500	108	83	35	60	93	152	334	327	26,00	1.095,00

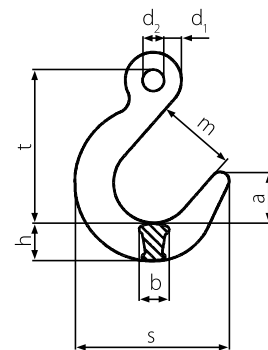

# Sicherheitslasthaken mit Öse

nach EN 1677-2, selbstverriegelnd

Typ	Traglast kg	Abmessungen						Gewicht kg	Preis pro Stück Euro
		b	d <sub>1</sub>	d <sub>2</sub>	h	m	t		
6-8	1.120	17	11	21	20	28	110	0,50	38,90
7/8-8	2.000	20	12	25	26	34	136	0,90	39,20
10-8	3.150	29	15	35	30	45	169	1,50	56,40
13-8	5.300	35	20	40	40	52	205	2,70	93,80
16-8	8.000	41	27	50	50	60	251	5,70	172,90

